


A B C D E F G H I J K

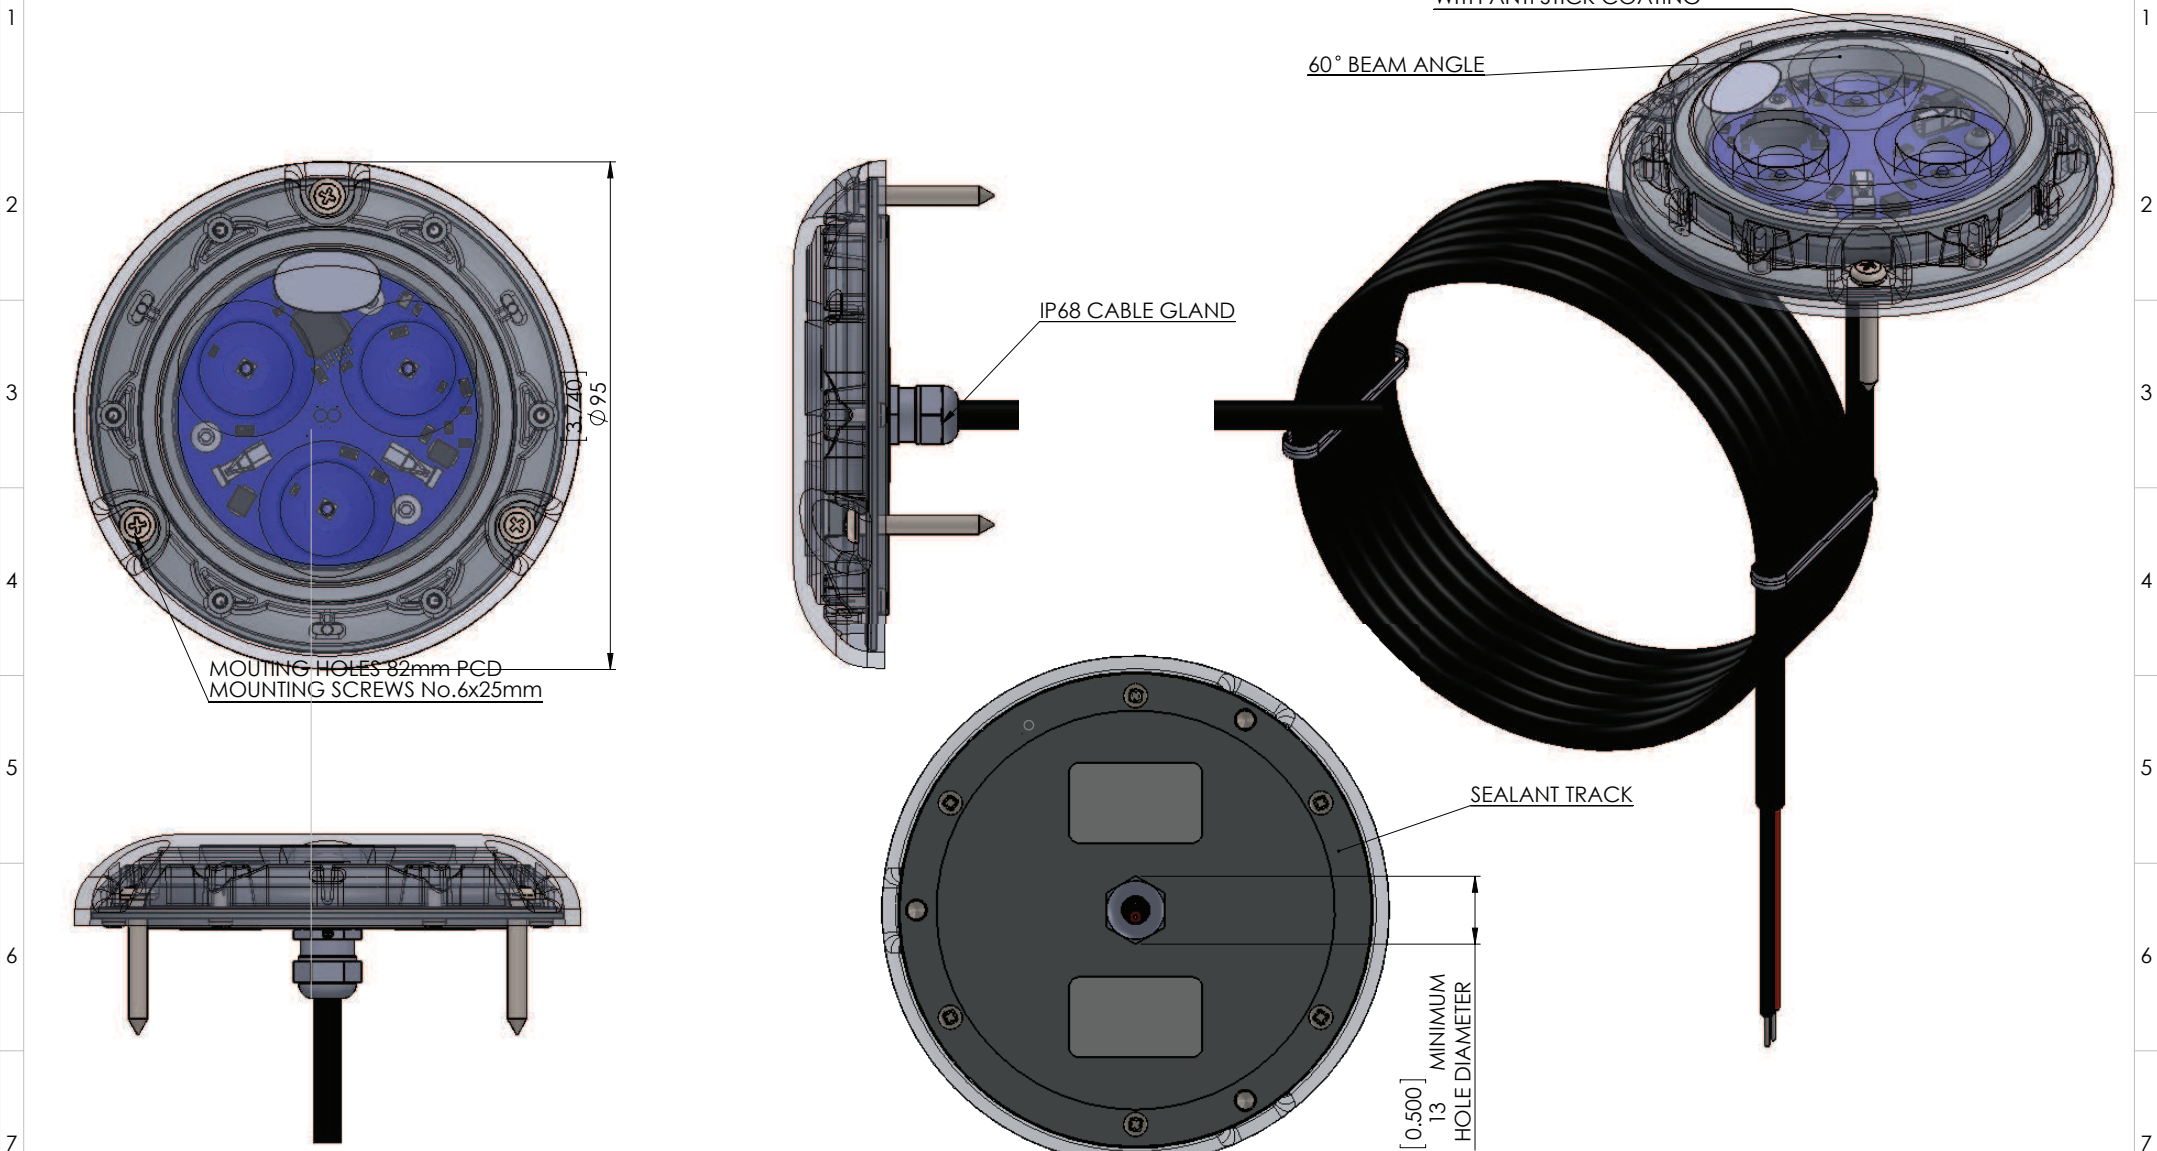

LENS: 3mm HIGH IMPACT POLYMER WITH ANTI STICK COATING

60° BEAM ANGLE

IP68 CABLE GLAND

MOUNTING HOLES 82mm PCD
MOUNTING SCREWS No.6x25mm

SEALANT TRACK

[0.500] 13 MINIMUM HOLE DIAMETER

	THIRD ANGLE PROJECTION	Sheet. 2 of 4	Scale. 1:1	A3
--	------------------------	---------------	------------	----



ALL DIMENSIONS ARE IN MILLIMETERS
 TOLERANCES ON CASTINGS, UNMACHINED PARTS AND FABRICATIONS, +/- 0.8
 TOLERANCES ON MACHINED DIMENSIONS
 WHOLE UNITS +/- 0.25
 ONE DEC. PLACE +/- 0.1
 TWO DEC. PLACE +/- 0.05
 ANGLES +/- 0.5 DEG.
 ALL UNSPECIFIED CHAMFERS 1 x 45
 BREAK ALL SHARP EDGES 0.1 TO 0.5

Iss	Rev	Status	Date	Change	Drawn	Chk'd	Appv'd
-	-	See Sheet 1	-	-	-	-	-

Notes.
 LUMENS: 1100, WATTAGE: 18, No. LEDs: 3
 1 @ 12V: 1.2 1 @ 24V: N/A
 Beam Angle: 60 Deg FWHM
 LIGHT Dia: 95mm, HEAD HEIGHT: 17.6mm
 OVERALL LENGTH: 30mm
 MOUNT HOLE PCD: 82mm
 HULL CUTOUT Dia: 13mm, APERTURE: 56mm
 WEIGHT: 400gm
 PPN.

Description.	PIRANHA SM3		
Material.			
Finish.			
DWG No.	Iss.	Rev.	Status.
GAA-0100 Iss F00B	F00	B	RELEASED

© 2014 COASTLINE LED THIS DOCUMENT MUST NOT BE REPRODUCED IN WHOLE OR IN PART AND MUST NOT BE USED OR DISCLOSED WITHOUT THE WRITTEN AUTHORISATION OF COASTLINE LED. NO DEVIATION FROM THIS DRAWING IS PERMISSABLE WITHOUT WRITTEN AUTHORISATION FROM COASTLINE LED.