


WIRING CONNECTION

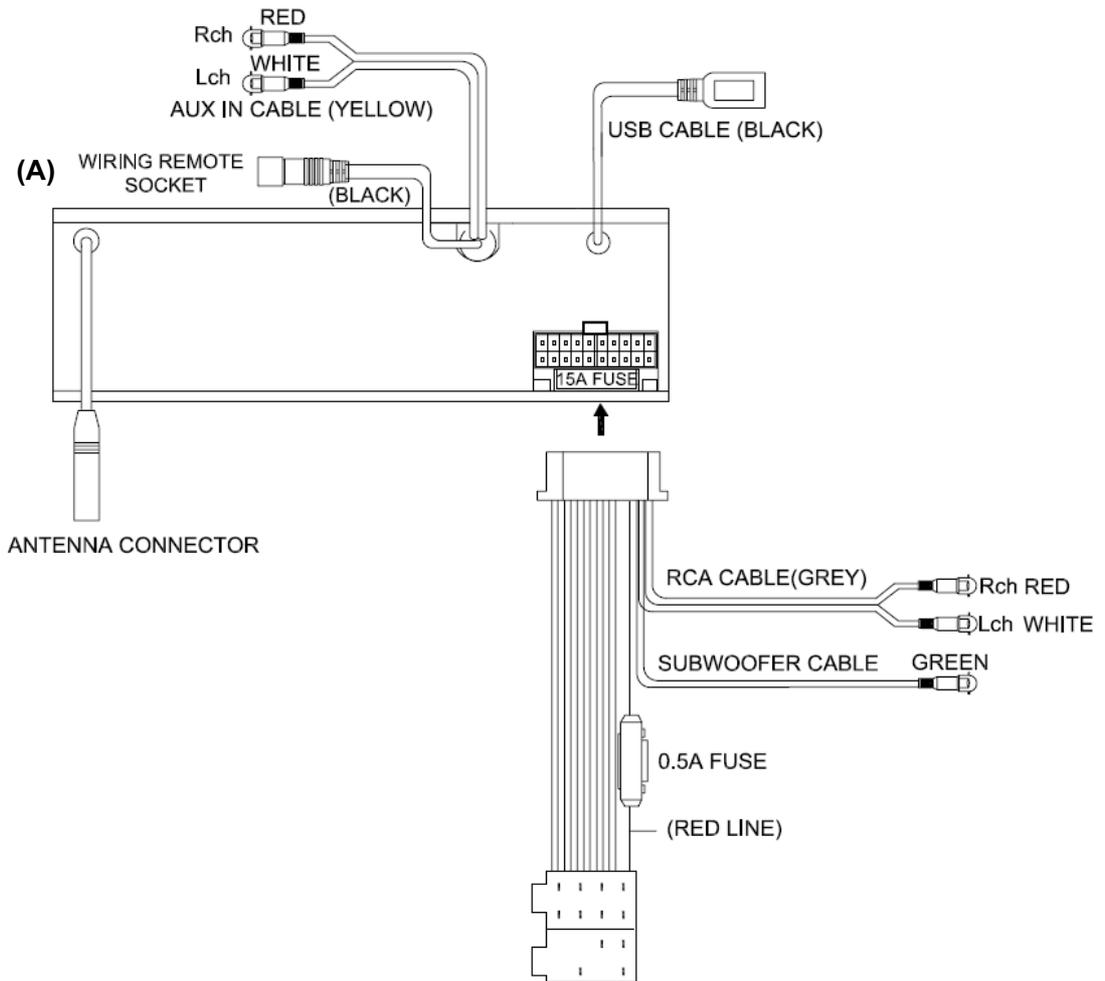


Connector A

1. N.C.
2. N.C.
3. N.C.
4. MEMORY +12V (YELLOW)
5. AUTO ANTENNA OUTPUT (BLUE)
6. N.C.
7. +12V (TO IGNITION KEY) (RED)
8. GROUND (BLACK)

Connector B

1. REAR RIGHT SPEAKER (+) (VIOLET)
2. REAR RIGHT SPEAKER (-) (VIOLET/BLACK)
3. FRONT RIGHT SPEAKER (+) (GRAY)
4. FRONT RIGHT SPEAKER (-) (GRAY/BLACK)
5. FRONT LEFT SPEAKER (+) (WHITE)
6. FRONT LEFT SPEAKER (-) (WHITE/BLACK)
7. REAR LEFT SPEAKER (+) (GREEN)
8. REAR LEFT SPEAKER (-) (GREEN/BLACK)

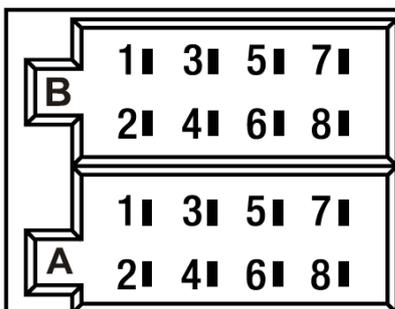

Note: The black wiring remote cable/socket (A) on the unit is for the commander MRC21 and it is also compatible with the MRF90 receiver.